



RCBDD 系列矿用隔爆型自卸式电磁除铁器

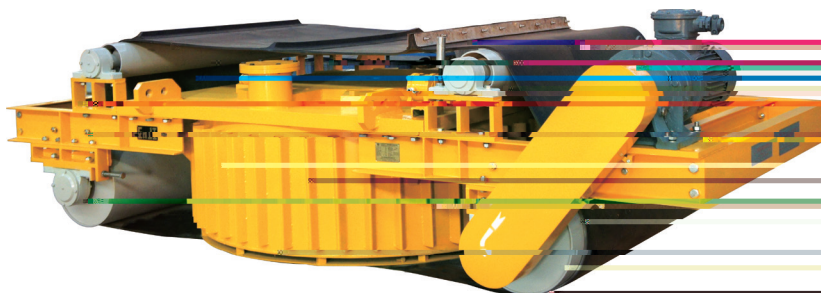

用途:

特点:

RS- 485

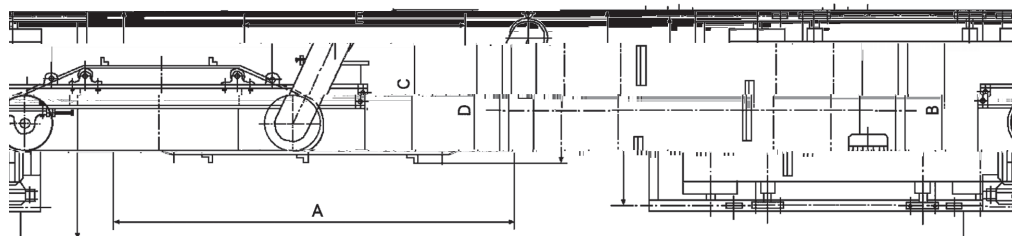

主要技术参数：

	mm	mm	mm	kW	kg	mm				
						A	B	C	D	E
RCBDD- 5	500	150	60	1.5	980	1900	1050	735	858	1000
RCBDD- 6.5	650	200	60	2.2	1490	2315	1110	730	988	1240
RCBDD- 8	800	250	70	2.2	1770	2560	1280	765	1133	1300
RCBDD- 10	1000	300	70	3	2380	2800	1540	820	1418	1500
RCBDD- 12	1200	350	70	4	3350	2910	1760	820	1518	1500
RCBDD- 14	1400	400	70	4	4800	3150	1990	850	1755	1900
RCBDD- 16	1600	450	70	5.5	6300	3720	2220	910	1880	1060
RCBDD- 18	1800	500	72	7.5	8800	3580	2450	1210	2200	2130
RCBDD- 20	2000	550	72	11	11200	3800	2700	1300	2400	2410
RCBDD- 22	2200	600	72	15	13000	4200	3000	1400	2600	2500
RCBDD- 24	2400	650	72	18.5	15000	4585	2670	1026	2800	2600

RCBDD-□ T 系列超强矿用隔爆自卸式电磁除铁器

主要技术参数：

			mm	mm	mT	kw	kw	m/s	mm A × B × C	kg
RCBDD- 6 5	T1	650	200	90	4	2.2	5.8	2320× 1190× 820	1800	
	T2			120	6	2.2		2540× 1350× 860	2250	
	T3			150	10	2.2		2750× 1400× 860	2950	
RCBDD- 8	T1	800	250	90	5.3	2.2	5.8	2520× 1350× 880	2320	
	T2			120	7.5	2.2		2750× 1630× 880	2560	
	T3			150	11.5	3		2800× 1650× 920	3450	
RCBDD- 10	T1	1000	300	90	7.1	3	5.8	2750× 1650× 920	3100	
	T2			120	9	4		2920× 1750× 950	3700	
	T3			150	14	5.5		3000× 1800× 960	4600	
RCBDD- 12	T1	1200	350	90	9	4	5.8	2950× 1750× 950	4320	
	T2			120	13.5	4		3150× 2050× 950	5320	
	T3			150	16	5.5		3450× 2050× 960	6100	
RCBDD- 14	T1	1400	400	90	11.5	4	5.8	3200× 2100× 960	6390	
	T2			120	18	5.5		3750× 2250× 1180	7400	
	T3			150	25	7.5		3900× 2250× 1180	8200	
RCBDD- 16	T1	1600	450	90	18	5.5	5.8	3900× 2200× 1150	7150	
	T2			120	25	7.5		4100× 2450× 1200	8700	
	T3			150	40	11		4100× 2450× 1260	11750	
RCBDD- 18	T1	1800	500	90	25	7.5	5.8	4100× 2450× 1230	9550	
	T2			120	32	11		4350× 2600× 1280	11540	
	T3			150	45	11		4350× 2650× 1280	15000	
RCBDD- 20	T1	2000	550	90	30	11	5.8	4600× 2650× 1280	12460	
	T2			120	40	11		4950× 2850× 1300	14700	
	T3			150	50	15		4950× 2850× 1350	18690	
RCBDD- 22	T1	2200	600	90	40	15	5.8	5100× 2950× 1319	16000	
	T2			120	50	18.5		5200× 2950× 1390	18100	
	T3			150	60	18.5		5300× 2950× 1440	23500	

()